



CONNECTORS AND CONTROLS

1. One monitor system with one camera.

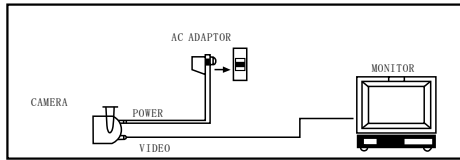

2. One monitor system with two or more cameras.

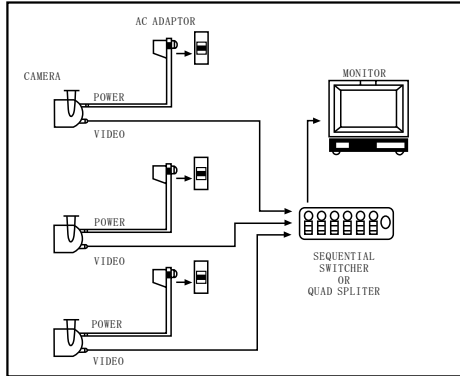

2

SPECIFICATIONS

| | |
|-------------------------|--|
| MODEL | QS2814C |
| Image Sensor | 1/4" SHARP Color CCD |
| TV System | NTSC/PAL |
| Horizontal resolution | 420 TV Lines |
| Sync system | Internal synchronization |
| Usable illumination | 0Lux |
| | At night (Led on) |
| S/N Ratio | ±48dB (AGC Off) |
| % characteristic | 0.45 |
| Video output | 1 Vp-p/75 ohm |
| Electronic shutter time | Auto, NTSC: 1/60~1/100,000Sec PAL: 1/50~1/100,000Sec |
| Scanning system | NTSC: 525 Lines, 60Field/Sec PAL: 625 Lines, 50 Field/Sec |
| Operation temp | -10°C~+50°C RH 95% Max |
| Storage temp | -20°C~+60°C RH 95% Max |
| Lens | Select |
| Power supply | DC 12V / 400mA |
| Weight | 500g |

IR Series

| | |
|-------------------|---------------------------|
| Input Voltage | DC 12V .400mA (±10%) |
| Distance | 45 feet |
| H.V. Angle | 40° |
| Power Consumption | 2.0Watts |
| Power on | CDS Auto Control |
| LED | 24 Unit Infrared LED |
| Window | 50mm Heat-Resisting Glass |
| IR Status | Under 10 lux by CDS |
| Construction | Aluminum |
| Operation Temp | -20°C~+60°C |

3

Brief of product

Products of this series are high-quality cameras designed for closed-circuit surveillance. We adopted the latest Japanese technology of sensor and driver. Their characteristic are high clear, strong anti-jamming, rich and realistic color, high stability, and widely applicable to indoor, outdoor, day and night, automotive rear view etc. Moreover they have small volume, to light weight, high integrative level, easy and convenient fix and use.

Characteristic of product

The shell adopts high-quality material of aluminum. (High hardness)
The surface uses high preservative adhesive force. (Acid resisting)
All interface use airtight. (Fit to use on outdoor and rainy seasons)
Add huge power and over launch tube infrared ray. (Fit to use on day and night)
It settles the problem, which is ordinary radiator of pickup camera. (Work steadily)
Design and specifications are subject to change without notice. Weight and dimension shown are approximate.

4



QS2814C

INSTRUCTION

MANUAL

1