



QSDT8DP Motion Detection Recording

STEP 1: Press the “Menu” Button on the front DVR panel

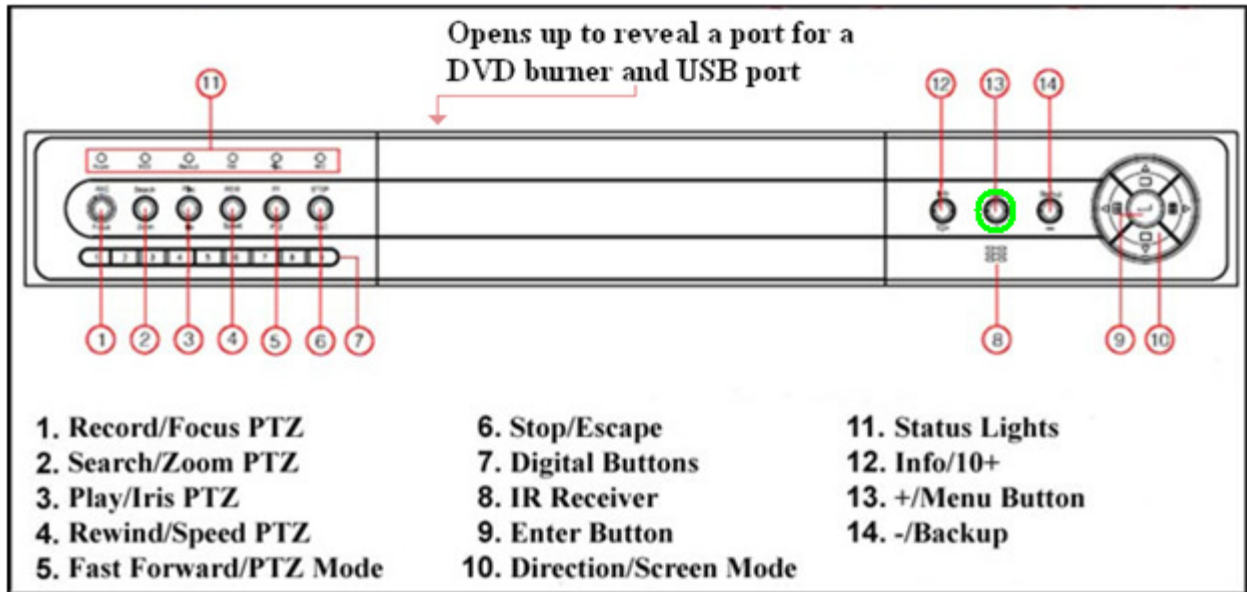


STEP 2: Enter Login information to access the System menu. Default User name is “admin” and default Password is “123456” (this can be punched in on the front panel of the DVR using the digital buttons and direction keys).

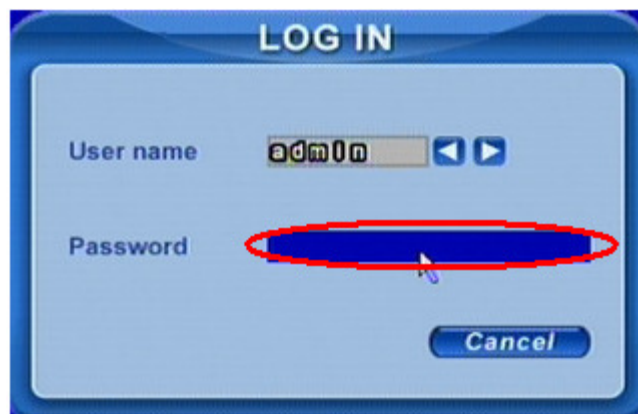


QSDT8DP Motion Detection Recording

STEP 3: On the System menu screen, select the Motion submenu using the “Enter” button on the front panel.

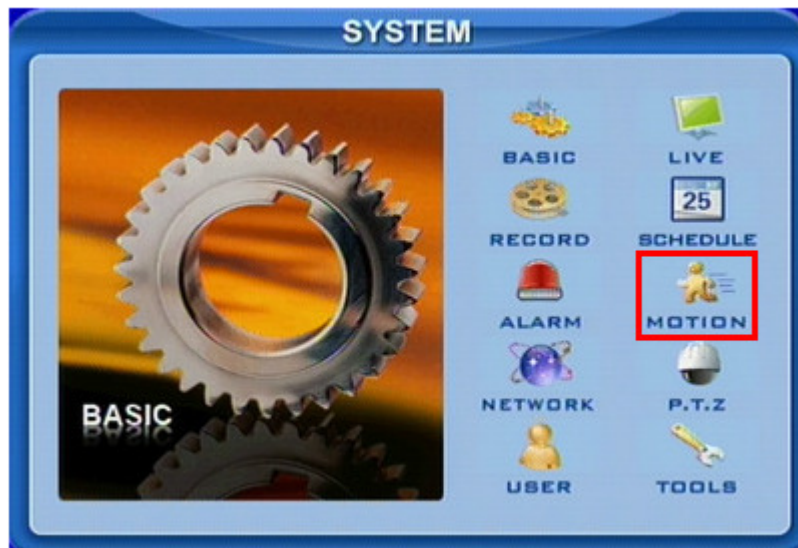

STEP 4: Select the channel that you want to set up motion detection for

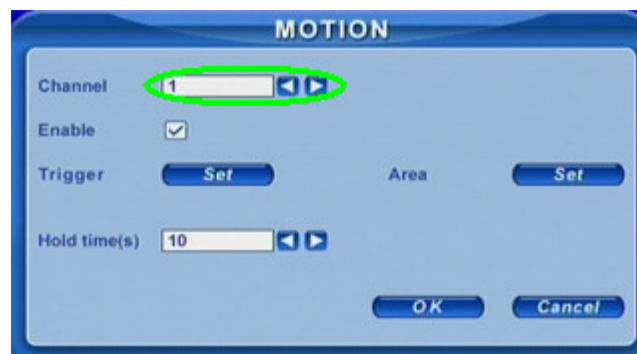


QSDT8DP Motion Detection Recording


STEP 5: Put a checkmark in the box next to “Enable”



STEP 6: Move the cursor to the “Set” button next to Area and press “Enter”

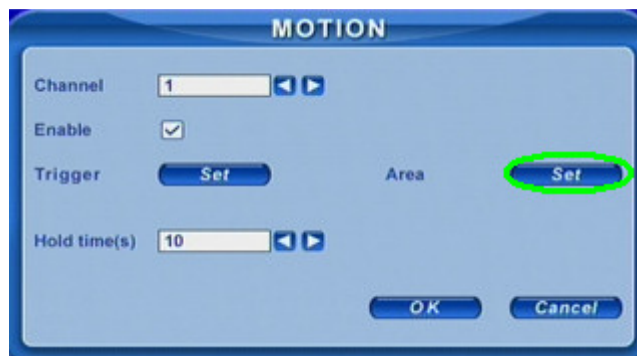


STEP 7: Move the cursor to “All” and press “Enter”; if you wish to customize the motion detection area, move the cursor to “Custom” and press Enter

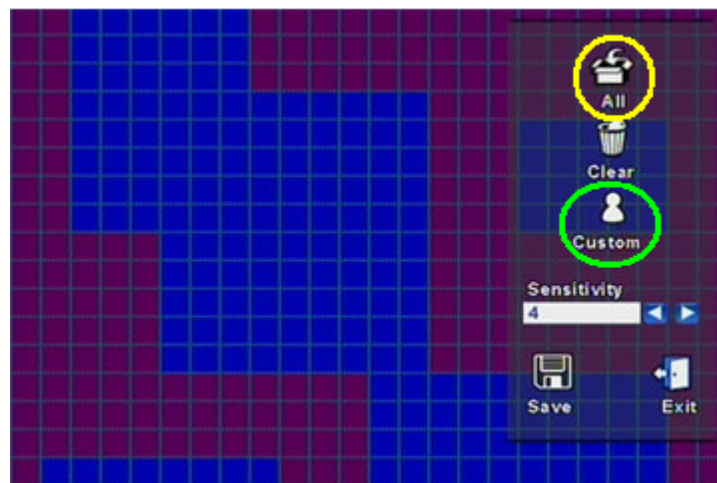

QSDT8DP Motion Detection Recording

STEP 8: If you selected “All” go to the next step; if you selected “Custom”, use the direction keys and the enter button to set the area. (The area that will set off motion detection will be clear).

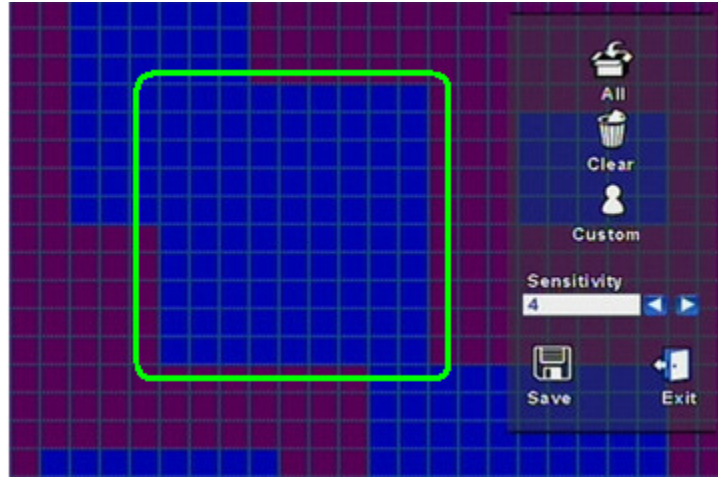


STEP 9: Move the cursor to “Sensitivity” and set the detection strength.




QSDT8DP Motion Detection Recording

STEP 10: Move the cursor to “Save” and press “Enter”.

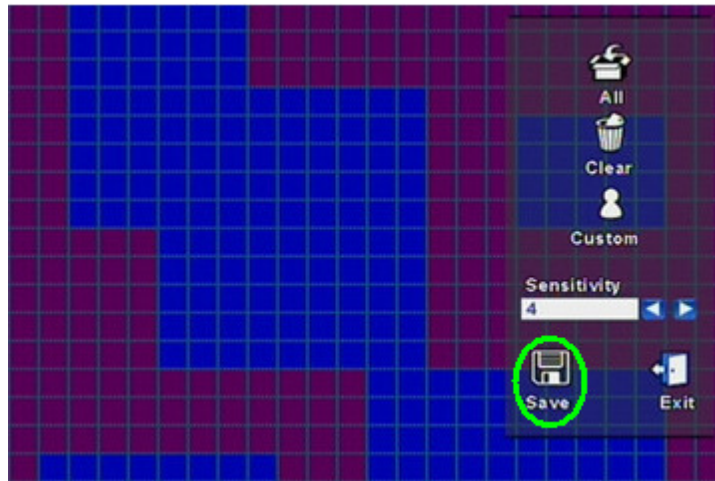


STEP 11: Move the cursor to “OK” and press “Enter”.

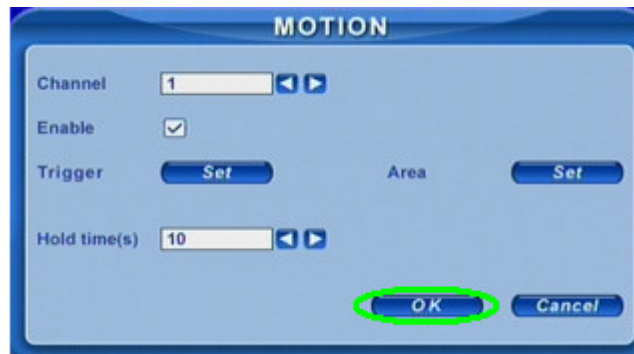


QSDT8DP Motion Detection Recording

STEP 12: Move the cursor to “OK” and press “Enter”

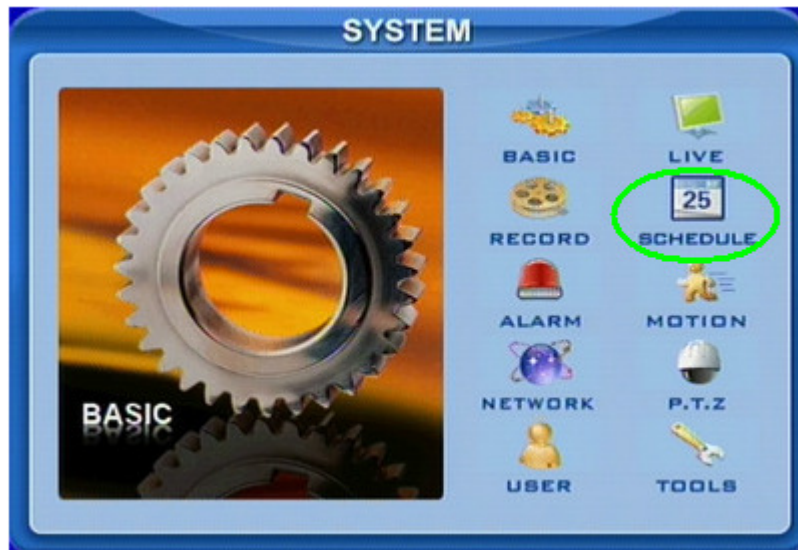


STEP 13: Put a checkmark in the box next to “Motion”

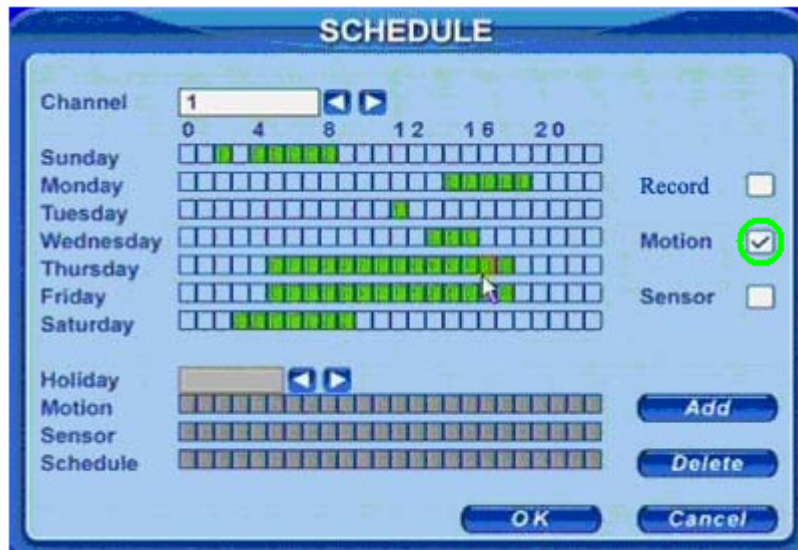

QSDT8DP Motion Detection Recording

STEP 14: Select the channel that you want to set up motion detection for.

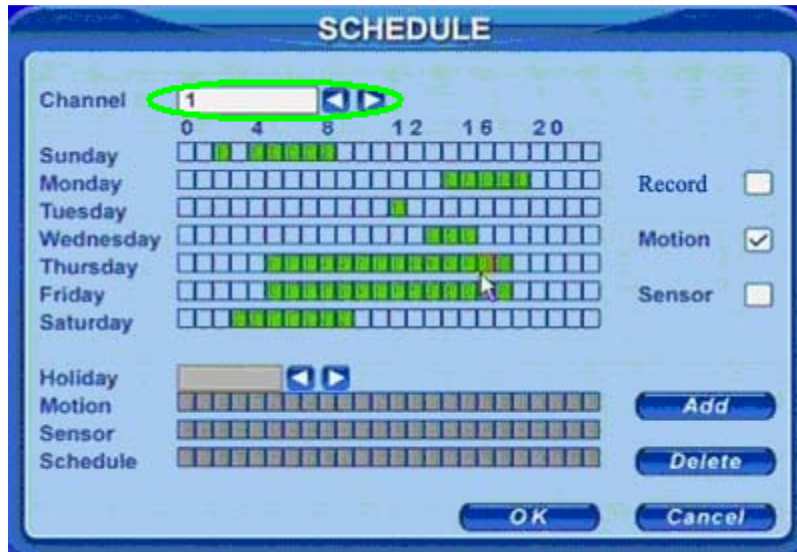


STEP 15: Use the direction keys and Enter button to select the date and times for Motion recording. The green portion of the schedule is active.



QSDT8DP Motion Detection Recording

STEP 16: Move the cursor to “OK” and press “Enter”.

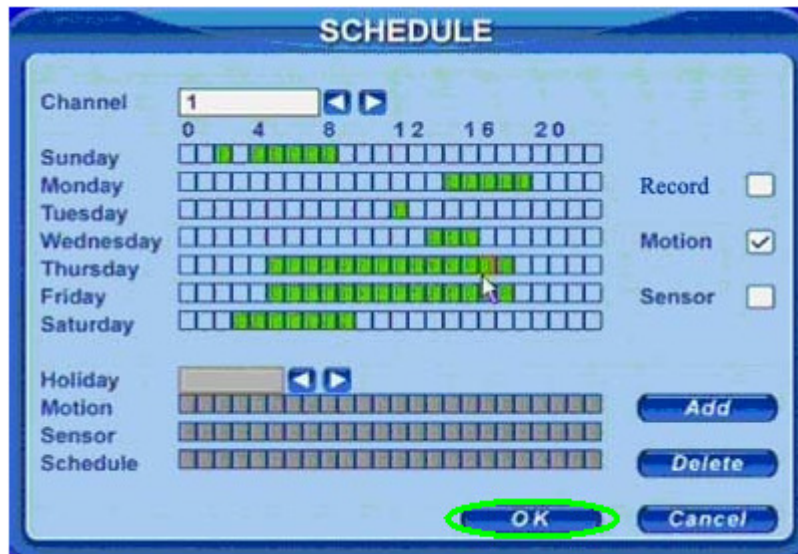

STEP 17: When motion detection is on, a small yellow dot will appear on the channel display screen as shown below.

